



ORIGIN
ACOUSTICS®

2020 OUTDOOR AUDIO CATALOG



Genesis
HOME TECHNOLOGY ARCHITECTS



Let's make
WOW
the standard...
together



partners.genesis-tech.eu

TAME THE WILD

That time spent in your backyard, when the weather is perfect and you're surrounded by the people you love, that's the moment we designed these loudspeakers for. The high-quality weatherproof enclosures ensure that you'll always have just the right musical ambiance when you need it. Our detail-driven digital signal processing 70v Amplifiers purify your sound while providing long-range rock-solid power. And as the designers of the first luxury bollard loudspeaker, you can look and sound great in a sleek aluminum finish.



SEASONS LANDSCAPE

Our bullet-style landscape loudspeakers provide just what you need for outdoor audio: rock-solid IPX6 build, premium drivers, heavy-duty 50w 70v taps, and flexible mounting hardware. All of our landscape satellites can be run in both 8-ohm and 70v, increasing the flexibility of the installation method. Still, our burial subwoofers kick, and with our DSP3-700 amplifier, a system can be wired in stereo with a direct DSP channel for the subs. This way, the entire system can be dialed in for a fantastic result.

SATELLITES



LS64



LS44

SUBWOOFERS



OSUB12



OSUB10



OSUB10P



OSUB8



SEASONS LANDSCAPE



TITANIUM TWEETERS



PASSIVE RADIATORS



DISCREET STYLING




BURIAL SUBWOOFERS



70/100V TRANSFORMER



SCALABLE SYSTEMS

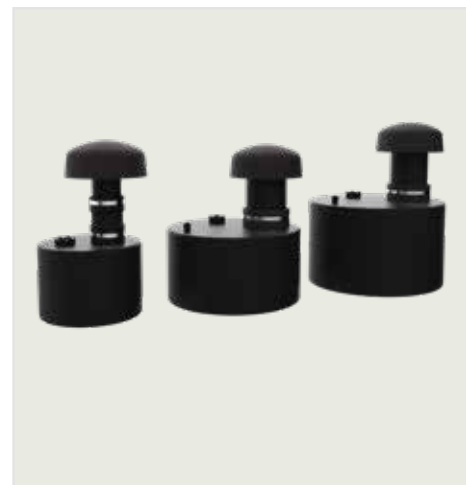

PACKAGES

LS44 4" Landscape Speaker x 4
 LSSS Small Spike x 4
 OSUB8 x1
 DSP3-100 x1



LS Package - 1

LS44 4" Landscape Speaker x 4
 LSSS Small Spike x 4
 OSUB8 x1
 DSP3-700 x1



LS Package - 2

LS44 4" Landscape Speaker x 8
 LSSS Small Spike x 8
 OSUB8 x2
 DSP3-700 x1



LS Package - 3

LS64 4" Landscape Speaker x 4
 LSLS Large Spike x 4
 OSUB10 x1
 DSP3-700 x1



LS Package - 4

LS64 4" Landscape Speaker x 4
 LSLS Large Spike x 4
 OSUB12 x1
 DSP3-700 x1



LS Package - 5

LS64 4" Landscape Speaker x 8
 LSLS Large Spike x 8
 OSUB10 x2
 DSP3-700 x1




LS Package - 6



BOLLARD LANDSCAPE

The Luxury Landscape Bollard Loudspeaker simplifies landscape installation while elevating outdoor aesthetics. Each Bollard includes a down-firing two-way four-inch loudspeaker directly above an acoustic lens. With both 180 and 360-degree configurations, the coverage area is significantly larger than most landscape loudspeakers. To reinforce the low-end, each Bollard also includes an easy to bury 8" subwoofer that ports just below the acoustic lens. So, by providing multiple smaller woofers across the installation, the bass frequencies are even regardless of the listener's position.

SQUARE

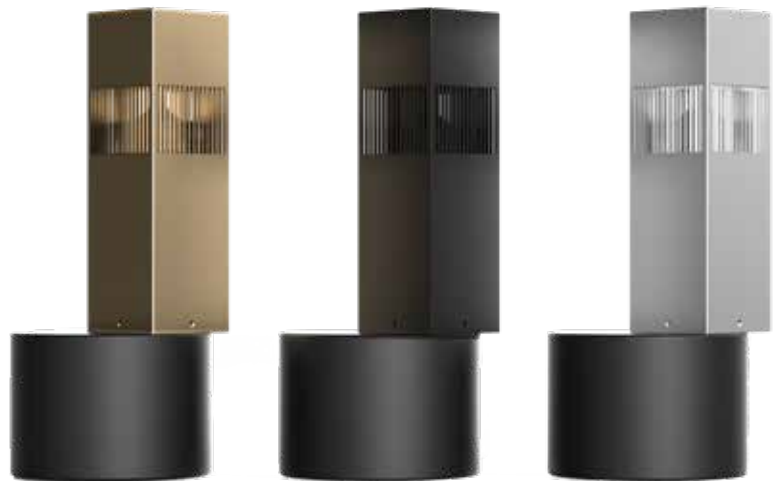

ROUND





360° DISPERSION



ALUMINUM CHASSIS



MODERN STYLING



THREE DRIVERS



BURIAL SUBWOOFERS



70/100V TRANSFORMER



PACKAGES

LSB64 x2
 DSP3-700 x1
 PA-15 x1



Bollard Package - 1

LSB64 x 4
 DSP3-700 x1
 PA-15 x1




Bollard Package - 2

LSB64 x 6
 DSP3-700 x1
 PA-15 x1



Bollard Package - 3

LSB64 x8
 DSP3-700 x1
 PA-15 x1

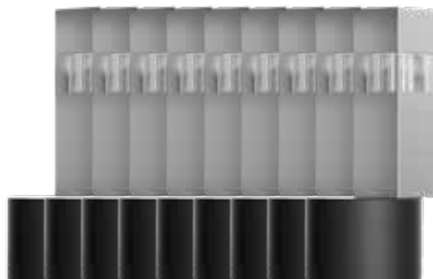

Bollard Package - 4

LSB64 x10
 DSP3-700 x1
 PA-15 x1



Bollard Package - 5

LSB64 x6
 DSP3-700 x1
 PA-15 x1
 OSUB10 x2



Bollard Package - 6



ACOUSTIC LANDSCAPE

A standard 2-channel receiver or amplifier and some 4-conductor wire are all that's needed to plant the AS41 directly into your landscape. The satellite speakers come with rust-proof HDPE stakes attached that spike right into a foundation of rock, grass, and soil with ease. Embedded underground, the subwoofer body provides resounding bass while leaving only a non-intrusive cap.

SYSTEM



AS41SYS

ACCESSORIES



AS4SAT



ACOUSTIC LANDSCAPE



TWO-WAY DESIGN



SCALABLE SYSTEMS



DISCREET STYLING




BURIAL SUBWOOFERS



USE ANY AVR



SPIKES INCLUDED

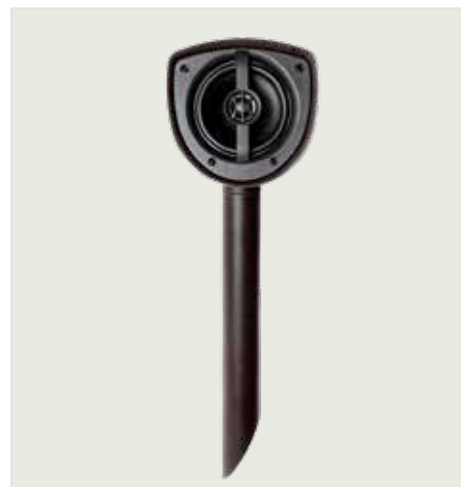

PACKAGES

AS41SYS	x1
A2150	x1



AS41 Package - 1

AS41SYS	x1
AS4SAT	x1
A2150	x1



AS41 Package - 2

AS41SYS	x1
AS4SAT	x2
A2150	x1



AS41 Package - 3

AS41SYS	x1
---------	----



AS41 Package - 4

AS41SYS	x1
AS4SAT	x1



AS41 Package - 5

AS41SYS	x1
AS4SAT	x2



AS41 Package - 6



AMBISONIC SYSTEMS

When Jeffrey James Coombs founded Ambisonic Systems, he did so for one reason, to follow his love of creating the highest caliber of professional loudspeakers. This vision has been his driving factor since the early seventies when, as a teenager, he began building the installed speakers that eventually lead to methods and designs that now define Custom Integrated sound. The loudspeakers of Ambisonic Systems are his defining masterpieces, articulate, musical, and rugged.

SATELLITES



LSR6



LSR8



6.5HD



6.5HD2

SUBWOOFERS



S11BP-IG



12BP-IG



12HDR-AW



10HDR-AW



AMBISONIC SYSTEMS



CUSTOM



26.5HD



212HD



6.5HDLA-4

PATENTED RIBBON



LOW DISTORTION



WOVEN CARBON-FIBER



HIGH OUTPUT



TOROIDAL TRANSFORMER



SAME ACCESSORIES



PACKAGES

LSR6	x4
10HDRAW	x1
D3200	x1



Ambisonic Package - 1

6.5HD	x4
10HDRAW	x1
D3200	x1



Ambisonic Package - 2

LSR8	x2
12HDRAW	x1
D3200	x1



Ambisonic Package - 3

LSR8	x4
12HDRAW	x1
D3200	x1



Ambisonic Package - 4

LSR8	x4
12BP-IG	x1
D3200	x1



Ambisonic Package - 5

6.5HD2	x1
12BP-IG	x2
D3200	x1



Ambisonic Package - 6




SPECIFICATIONS




ORIGIN SPEAKER SPECIFICATIONS

LS44

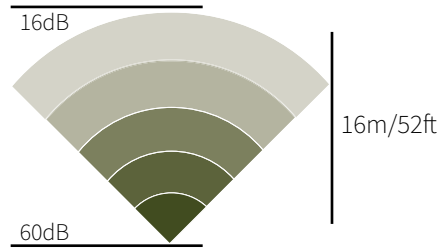


Woofer - 4.5" Poly/Rubber
Tweeter - .75" Titanium Dome
Response - 80Hz - 20kHz
Power RMS - 50w
Impedance - 8-ohm or 70/100v
Transformer - 30w/15w/7.5w/3.75w
Dimensions - 8.375 x 5.375 x 5.375"

LS64

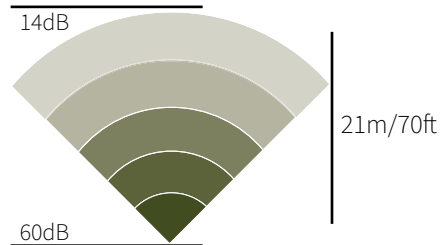


Woofer - 6" Poly/Rubber
Tweeter - 1" Titanium Dome
Response - 60Hz - 20kHz
Power RMS - 50w
Impedance - 8-ohm or 70/100v
Transformer - 50w/25w/12.5w/6.25w
Dimensions - 11 x 7 x 7"

LSB64

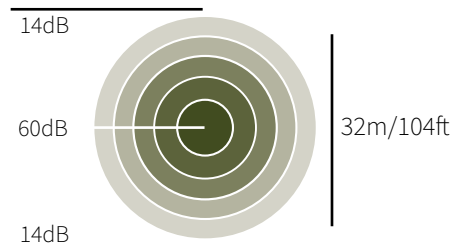

Woofer - 6.5" Poly/Rubber
Midrange - 4.5" Aluminum
Tweeter - 1" PEI
Response - 48Hz - 20kHz
Power RMS - 60w
Impedance - 4-ohm or 70/100v
Transformer - 50w/25w
Dimensions - 12.5 x 12.5 x 27"

AS4

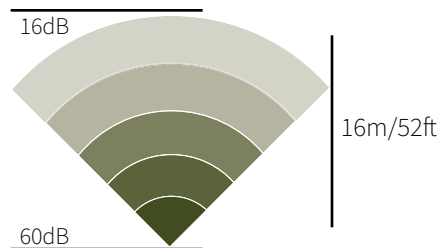


Woofer - 6" Poly/Rubber
Tweeter - 1" Titanium Dome
Response - 60Hz - 20kHz
Power RMS - 50w
Impedance - 8-ohm or 70/100v
Transformer - 50w/25w/12.5w/6.25w
Dimensions - 11 x 7 x 7"




AMBISONIC SYSTEMS SPECIFICATIONS

LSR6

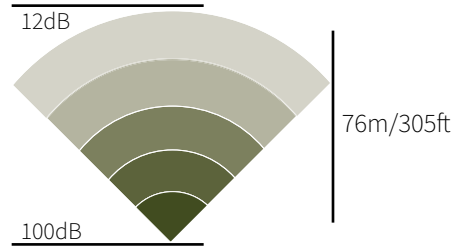


Woofer - 6" Poly/Rubber
 Tweeter - 1" Titanium Dome
 Response - 60Hz - 20kHz
 Power RMS - 50w
 Impedance - 8-ohm or 70/100v
 Transformer - 50w/25w/12.5w/6.25w
 Dimensions - 11 x 7 x 7"

LSR8

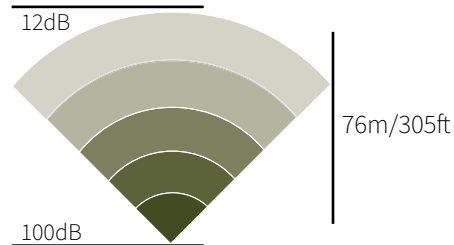

Woofer - 6" Poly/Rubber
 Tweeter - 1" Titanium Dome
 Response - 60Hz - 20kHz
 Power RMS - 50w
 Impedance - 8-ohm or 70/100v
 Transformer - 50w/25w/12.5w/6.25w
 Dimensions - 11 x 7 x 7"

6.5HD

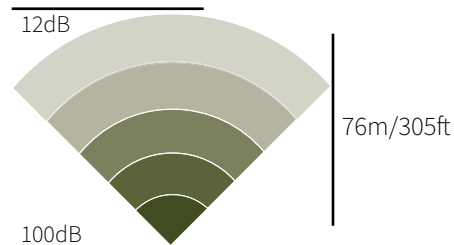

Woofer - 6.5" Poly/Rubber
 Midrange - 4.5" Aluminum
 Tweeter - 1" PEI
 Response - 48Hz - 20kHz
 Power RMS - 60w
 Impedance - 4-ohm or 70/100v
 Transformer - 50w/25w
 Dimensions - 12.5 x 12.5 x 27"



AMPLIFIERS SPECIFICATIONS

A2150



Channels - 2
Power - 2 x 150w (4-ohms)
Rack Requirements - 2u

DSP3-100



Channels - 3
Power - 2 x 150w DSP
1 x 300w DSP
Rack Requirements - 2u

DSP3-700



Channels - 2
Power - 3 x 700 DSP
Rack Requirements - 2u

L240



Channels - 2
Power - 2x 120w
Surface Mount
All Weather - IP66
WiFi / Bluetooth

D3200



Channels - 3
Power - 1 x 1000w DSP
2 x 1000w
Rack Requirements - 2u



SUBWOOFER SPECIFICATIONS

OSUB8



Frequency Response - 39Hz - 100Hz \pm 3dB

Transformer Tap - 100w

Dimensions - 12.4 x 12.4 x 21.2"

315 x 315 x 538mm

OSUB10



Frequency Response - 32Hz - 100Hz \pm 3dB

Transformer Tap - 300w

Dimensions - 15.75 x 15.75 x 21.2"

400 x 400 x 543mm

OSUB10P



Frequency Response - 32Hz - 100Hz \pm 3dB

Transformer Tap - 150w

Dimensions - 15.75 x 15.75 x 11.25"

400 x 400 x 286mm

OSUB12



Frequency Response - 23Hz - 100Hz \pm 3dB

Transformer Tap - 300w

Dimensions - 17.7 x 17.7 x 23.5"

450 x 450 x 598mm



12BP-IG



Frequency Response - 34Hz - 140Hz \pm 3dB

Transformer Tap - Optional - 300w

Dimensions - 18 x 22.25 x 30.4"

457 x 223 x 772 mm

S11BP-IG



Frequency Response - 41Hz - 150Hz \pm 3dB

Transformer Tap - Optional - 2 x 200w

Dimensions - 17 x 17 x 23.65"

432 x 432 x 600 mm

10HDR-AW



Frequency Response - 50Hz - 300Hz \pm 3dB

Transformer Tap - Optional - 300w

Dimensions - 12.75 x 12.75 x 16.5"

325 x 325 x 420 mm

12HDR-AW




Frequency Response - 41Hz - 300Hz \pm 3dB

Transformer Tap - Optional - 300w

Dimensions - 18 x 18 x 18"

457 x 457 x 457 mm



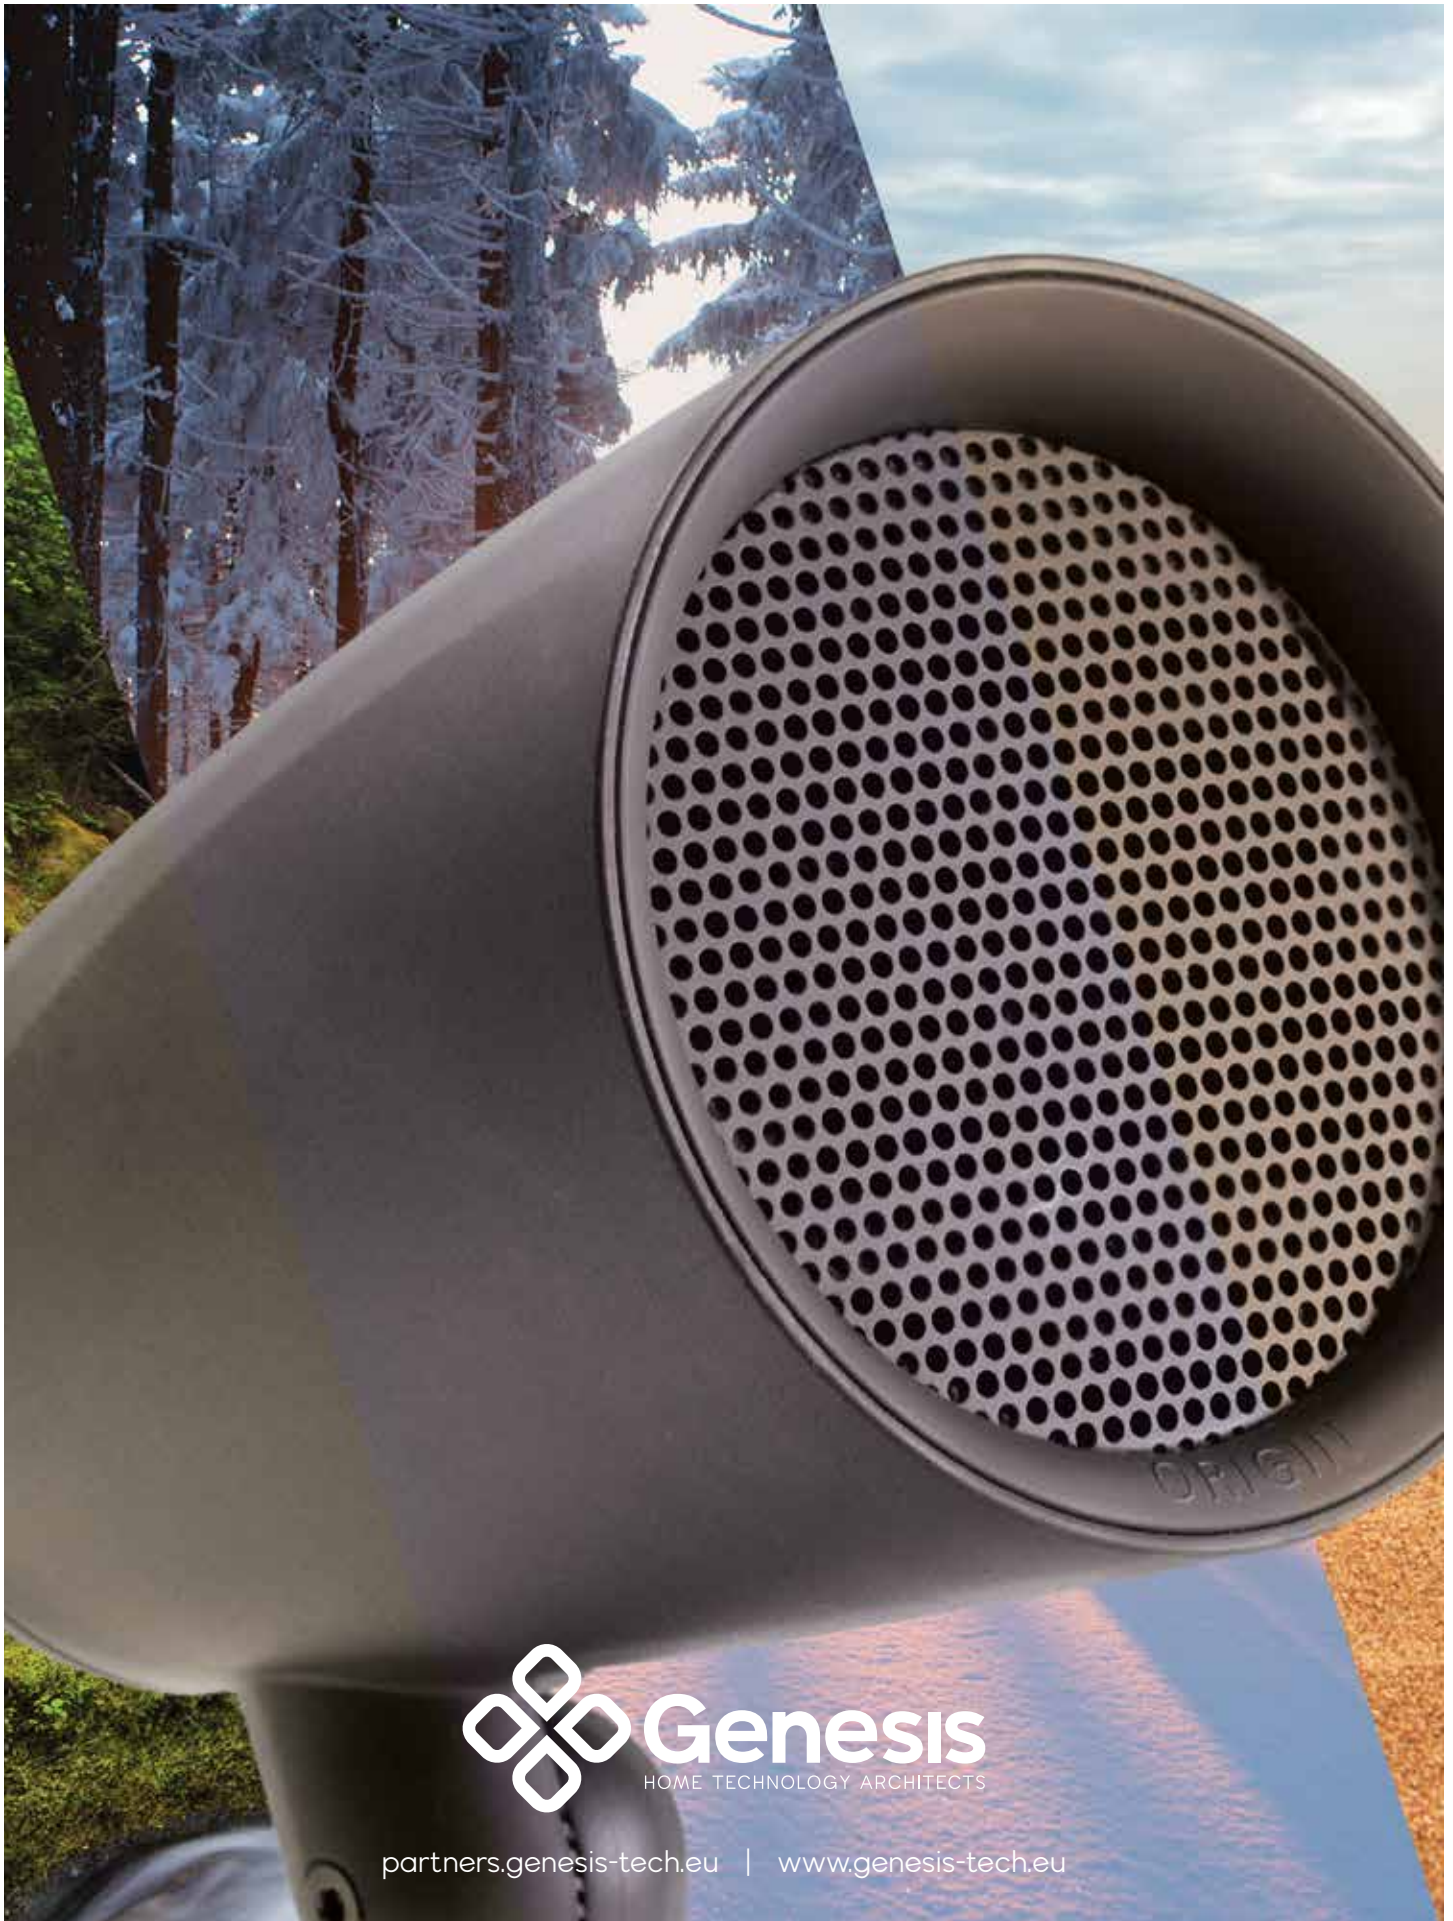

partners.genesis-tech.eu | www.genesis-tech.eu